


Z04/...

Führungssäule, ohne Schmiernut
 Locating guide pillar, without lubrication grooves
 Colonne de guidage, sans rainure de graissage

Mat.: ≈ 1.0401/690 + 70 HV 30
 ≈ DIN 16761-A



1

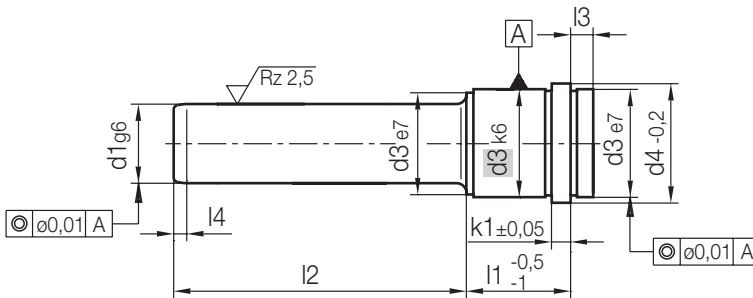


k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.						
3	4	3	16	14	22	9	25	Z04/22x 9x25						
							35	35						
							27	30	27x 9x30					
							50	50						
							36	25	36x 9x25					
							45	45						
							46	45	46x 9x45					
					56	60	56x 9x60							
					66	45	66x 9x45							
					22	10	25	10	22	14	30	Z04/22x10x25		
												35	35	
												27	30	27x10x30
												50	50	
												36	25	36x10x25
45	45													
46	45	46x10x45												
56	60	56x10x60												
66	45	66x10x45												
6	7	9	25	20	22	14	30	Z04/22x14x30						
							50	50						
							70	70						
							90	90						
							27	30	27x14x30					
							45	45						
							65	65						
					85	85								
					36	35	36x14x35	35	36	27	14	55	55	
												75	75	
												95	95	
												36	55	55
												75	75	
												95	95	
46	35	46x15x35												
45	45													
65	65													

k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.						
6	7	9	25	20	46	14	35	Z04/46x14x35						
							45	45						
							65	65						
							85	85						
							56	35	56x14x35					
							55	55						
							75	75						
					95	95								
					66	55	66x14x55	66	22	15	30	Z04/22x15x30		
												65	65	
												95	95	
												76	55	76x14x55
												95	95	
												86	55	86x14x55
95	95													
22	30	22x15x30	27	36	15	30	50	50						
							70	70						
							90	90						
							30	30	27x15x30					
							45	45						
							65	65						
							85	85						
36	35	36x15x35	46	36	15	35	55	55						
							75	75						
							95	95						
							46	35	46x15x35					
							45	45						
							65	65						
							95	95						

Z04/...

Führungssäule, ohne Schmiernut
 Locating guide pillar, without lubrication grooves
 Colonne de guidage, sans rainure de graissage

Mat.: ≈ 1.0401/690 + 70 HV 30
 ≈ DIN 16761-A

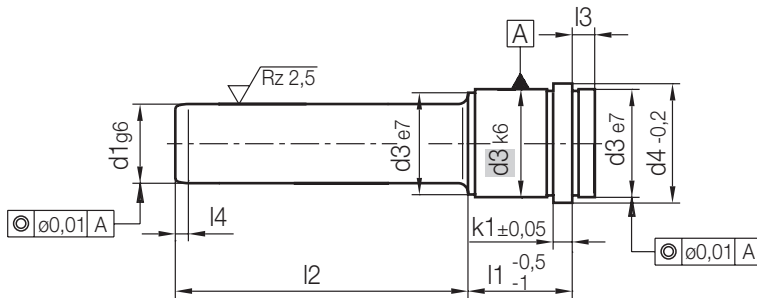

k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.	
6	7	9	25	20	46	15	85	Z04/46x15x 85	
							56	56x15x 35	
							55	55	
							75	75	
							95	95	
							95	95	
					66	55	66x15x 55		
						65	65		
						95	95		
						76	55	76x15x 55	
						95	95		
						86	55	86x15x 55	
			31	26	27	18	35	Z04/27x18x 35	
							45	45	
							65	65	
							85	85	
							105	105	
							36	35	36x18x 35
							55	55	
							75	75	
							95	95	
							115	115	
							135	135	
							46	35	46x18x 35
45	45								
65	65								
85	85								
135	135								
56	35	56x18x 35							
55	55								

k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.	
6	7	9	31	26	56	18	75	Z04/ 56x18x 75	
							66	66x18x 55	
							75	75	
							95	95	
							145	145	
							76	55	76x18x 55
							95	95	
							135	135	
							86	55	86x18x 55
							95	95	
							125	125	
							96	95	96x18x 95
					116	115	116x18x115		
					27	20	35	Z04/ 27x20x 35	
					45	45			
					65	65			
					85	85			
					105	105			
					36	35	36x20x 35		
					55	55			
					75	75			
					95	95			
					115	115			
					135	135			
46	35	46x20x 35							
45	45								
65	65								
85	85								
135	135								
56	35	56x20x 35							


Z04/...

Führungssäule, ohne Schmiernut
 Locating guide pillar, without lubrication grooves
 Colonne de guidage, sans rainure de graissage

Mat.: ≈ 1.0401/690 + 70 HV 30
 ≈ DIN 16761-A



1

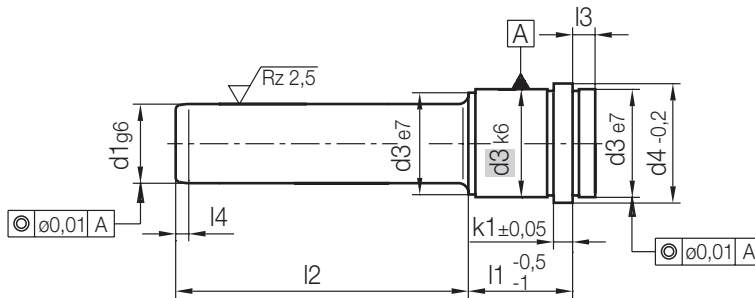


k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.
6	7	9	31	26	56	20	55	Z04/ 56x20x 55
							75	75
					66		55	66x20x 55
							75	75
							95	95
							145	145
					76		55	76x20x 55
							95	95
							135	135
					86		55	86x20x 55
							95	95
							125	125
					96		95	96x20x 95
					116		115	116x20x 115
			35	30	27	22	35	Z04/ 27x22x 35
							45	45
							65	65
							85	85
							105	105
							125	125
							165	165
							205	205
					36		35	36x22x 35
							55	55
							75	75
							95	95
							115	115
							135	135
							165	165
							205	205

k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.
6	7	9	35	30	46	22	35	Z04/46x22x 35
							45	45
							65	65
							85	85
							105	105
							125	125
							165	165
					56		35	56x22x 35
							55	55
							75	75
							95	95
							115	115
							165	165
							205	205
					66		35	66x22x 35
							55	55
							75	75
							95	95
							155	155
					76		55	76x22x 55
							75	75
							95	95
							115	115
							145	145
					86		55	86x22x 55
							75	75
							95	95
							135	135
					96		55	96x22x 55
							75	75

Z04/...

Führungssäule, ohne Schmiernut
 Locating guide pillar, without lubrication grooves
 Colonne de guidage, sans rainure de graissage

Mat.: ≈ 1.0401/690 + 70 HV 30
 ≈ DIN 16761-A

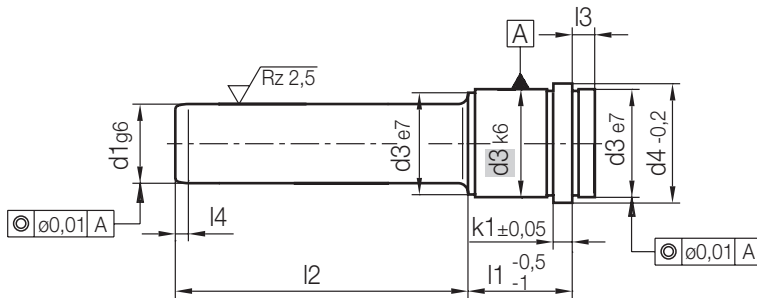


k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.
6	7	9	35	30	96	22	95	Z04/ 96x22x 95
							125	125
					116		75	116x22x 75
							115	115
							155	155
					136	135	135	136x22x 135
					156	155	155	156x22x 155
					27	24	35	Z04/ 27x24x 35
							45	45
							65	65
							85	85
							105	105
							125	125
							165	165
							205	205
					36		35	36x24x 35
							55	55
							75	75
							95	95
							115	115
							135	135
							165	165
							205	205
					46		35	46x24x 35
							45	45
							65	65
							85	85
							105	105
							125	125
							165	165

k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.
6	7	9	35	30	56	24	35	Z04/ 56x24x 35
							55	55
							75	75
							95	95
							115	115
							165	165
							205	205
					66		35	66x24x 35
							55	55
							75	75
							95	95
							155	155
					76		55	76x24x 55
							75	75
							95	95
							135	135
					86		55	86x24x 55
							75	75
							95	95
							135	135
					96		55	96x24x 55
							75	75
							95	95
							125	125
					116		75	116x24x 75
							115	115
							155	155
					136	135	135	136x24x 135
					156	155	155	156x24x 155

Z04/...

Führungssäule, ohne Schmiernut
 Locating guide pillar, without lubrication grooves
 Colonne de guidage, sans rainure de graissage

Mat.: ≈ 1.0401/690 + 70 HV 30
 ≈ DIN 16761-A

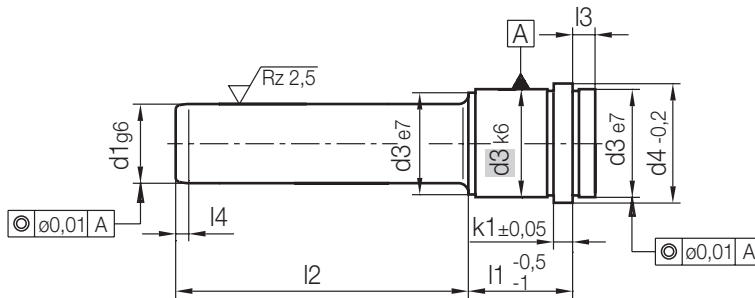


k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.
6	7	9	47	42	36	30	55	Z04/ 36x30x 55
							75	75
							155	155
							245	245
					46		65	46x30x 65
							85	85
							105	105
							125	125
							165	165
							245	245
					56		55	56x30x 55
							75	75
							95	95
							135	135
							175	175
							245	245
					66		55	66x30x 55
							75	75
							95	95
							115	115
							175	175
							295	295
					76		55	76x30x 55
							75	75
							95	95
							115	115
							155	155
							225	225
					86		75	86x30x 75
							95	95

k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.
6	7	9	47	42	86	30	115	Z04/ 86x30x 115
							155	155
							225	225
					96		75	96x30x 75
							95	95
							115	115
							155	155
							205	205
					116		75	116x30x 75
							115	115
							155	155
							205	205
					136		95	136x30x 95
							115	115
							155	155
					156		115	156x30x 115
							155	155
					196		155	196x30x 155
					36	32	55	Z04/ 36x32x 55
							75	75
							155	155
							245	245
					46		65	46x32x 65
							85	85
							105	105
							125	125
							165	165
							245	245
					56		55	56x32x 55
							75	75
							95	95

Z04/...

Führungssäule, ohne Schmiernut
 Locating guide pillar, without lubrication grooves
 Colonne de guidage, sans rainure de graissage

Mat.: ≈ 1.0401/690 + 70 HV 30
 ≈ DIN 16761-A

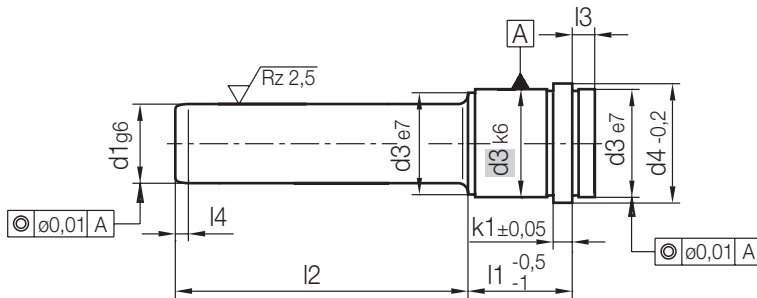

k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.	
6	7	9	47	42	56	32	135	Z04/ 56x32x 135	
							175	175	
							245	245	
							66	55	66x32x 55
								75	75
								95	95
								115	115
								175	175
								295	295
							76	55	76x32x 55
								75	75
								95	95
					115	115			
					155	155			
					225	225			
					86	75		86x32x 75	
						95		95	
						115		115	
						155		155	
						225		225	
						96		75	96x32x 75
					95		95		
					115		115		
					155		155		
205	205								
116	75	116x32x 75							
	115	115							
	155	155							
	136	95	136x32x 95						
115		115							
115		115							

k1	l4	l3	d4	d3	l1	d1	l2	Nr./No.							
6	7	9	47	42	136	32	155	Z04/ 136x32x 155							
							156	115	156x32x 115						
							155	155	155						
							196	155	196x32x 155						
							10	10	12	60	54	76	40	115	Z04/ 76x40x 115
														96	155
					116	135								116x40x 135	
					195	195								195	
					136	95								136x40x 95	
					135	135								135	
					10	10	12	60	54	76	42	115	Z04/ 76x42x 115		
												96	155	96x42x 155	
116	135	116x42x 135													
195	195	195													
136	95	136x42x 95													
135	135	135													
196	155	196x42x 155	195	195											