
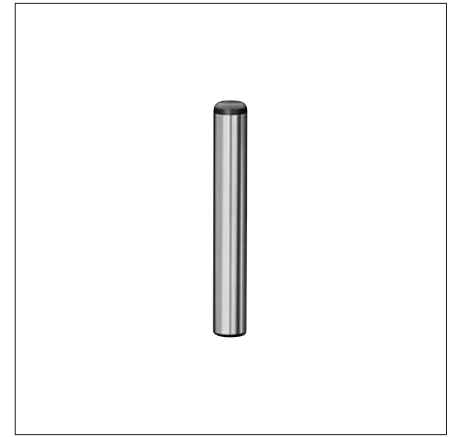


Z025 /...

Führungssäule, glatt
 Guide pillar, headless
 Colonne de guidage, lisse

Mat.: 1.8159/62 ± 2 HRC
 ISO 9182-2/DIN 9825-2

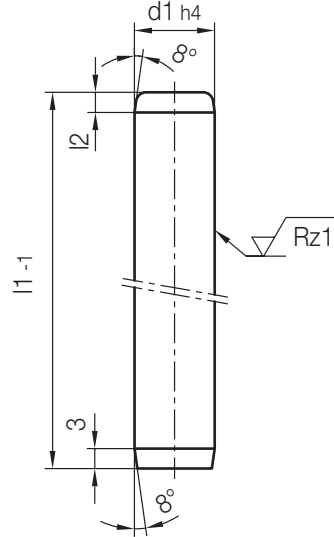



l2	d1	l1	Nr./No.
3	11	80	Z025/11 x 80
		90	90
		100	100
		112	112
		125	125
		140	140
	12	80	Z025/12 x 80
		90	90
		100	100
		112	112
		125	125
		140	140
4	15	90	Z025/15 x 90
		100	100
		112	112
		125	125
		140	140
		160	160
		180	180
		200	200
	16	90	Z025/16 x 90
		100	100
		112	112
		125	125
		140	140
		160	160
19	100	Z025/19 x 90	
	112	100	
	125	112	
	140	125	
	160	140	
	180	160	

l2	d1	l1	Nr./No.
4	19	200	Z025/19x200
		224	224
	20	100	Z025/20x100
		112	112
		125	125
		140	140
		160	160
		180	180
		200	200
		224	224
6	24	100	Z025/24x100
		112	112
		125	125
		140	140
		160	160
		180	180
		200	200
		224	224
		250	250
		280	280
	25	100	Z025/25x100
		112	112
		125	125
		140	140
		160	160
		180	180
		200	200
		224	224
		250	250
		280	280
30	125	Z025/30x125	
	140	140	
	160	160	
	180	180	

Z025/...

Führungssäule, glatt
 Guide pillar, headless
 Colonne de guidage, lisse

Mat.: 1.8159/62 ± 2 HRC
 ISO 9182-2/DIN 9825-2

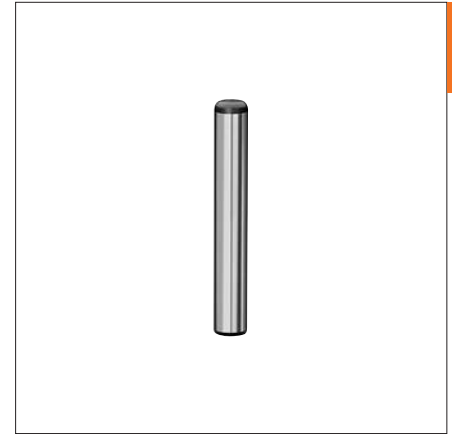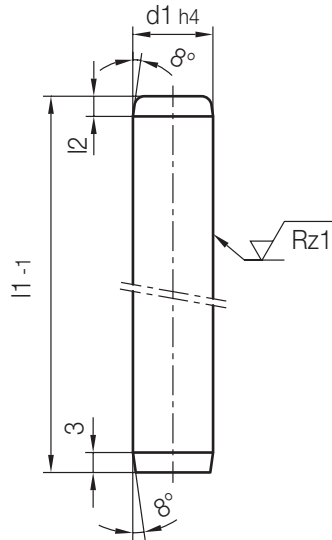

l2	d1	l1	Nr./No.
6	30	200	Z 025/30x200
		224	224
		250	250
		280	280
		315	315
	32	125	Z 025/32x125
		140	140
		160	160
		180	180
		200	200
		224	224
		250	250
		280	280
		315	315
		38	160
	180		180
	200		200
	224		224
	250		250
	280		280
	315		315
	355		355
	400		400
	40		160
		180	180
		200	200
		224	224
		250	250
280		280	
315		315	
355		355	
8	48	180	Z 025/48x180
		200	200

l2	d1	l1	Nr./No.	
8	48	224	Z 025/48x224	
		250	250	
		280	280	
		315	315	
		355	355	
		400	400	
		450	450	
		500	500	
		50	180	Z 025/50x180
			200	200
	224		224	
	250		250	
	280		280	
	315		315	
	355		355	
	400		400	
	450		450	
	500		500	
	60	250	Z 025/60x250	
		280	280	
		315	315	
		355	355	
		400	400	
		450	450	
		500	500	
		63	250	Z 025/63x250
	280		280	
	315		315	
	355		355	
	400		400	
	450		450	
	500		500	