


Z808 /...

Schnellkupplung, mit freiem Durchgang
 Rapid coupling, open flow
 Coupleur rapide, à passage ouvert


Mat.: 2.0401

Z81/...
 Z83/...
 Z830/...
 Z831/...
 Z90/...

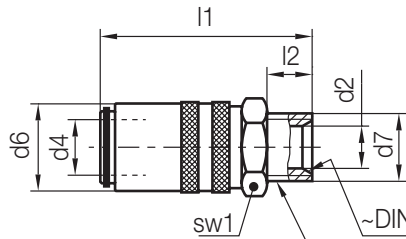

Z814/...
 Z855/...
 Z856/... Z8560/...
 Z875/...
 Z876/... Z876PL/...

~DIN 3863
 Mit Dichtmittel beschichtet
 Coated with sealing compound
 Recouvert avec ruban d'étanchéité

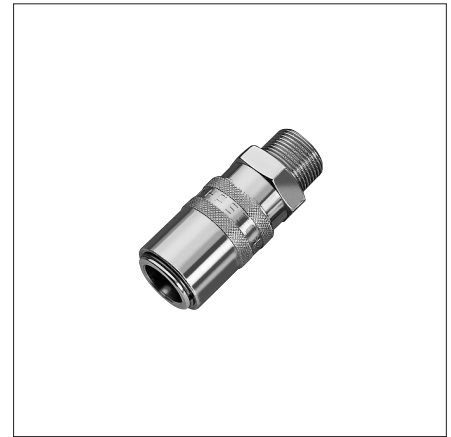

Medium	max. C°
Luft/air/air	200
Öl/oil/huile	200
Wasser/water/eau	150



Schlauchgrenzwerte können abweichen!
 Hose limits can differ!
 Les valeurs limites des tuyaux peuvent différer!



p [bar]	sw1	l2	l1	d6	d2	d4	d7	Nr./No.
25	17	9	48	17	6	9	M14x 1,5	Z808/ 9x14x1,5
	22		52	22	9	13	M16x 1,5	13x16x1,5
	30	16	78	31	15	19	M24x 1,5	19x24x1,5