
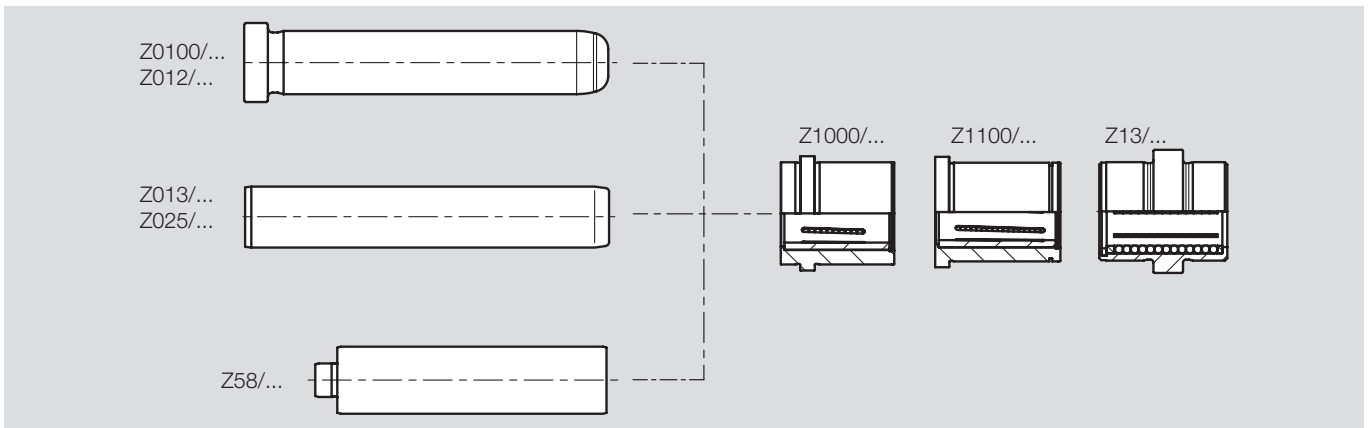
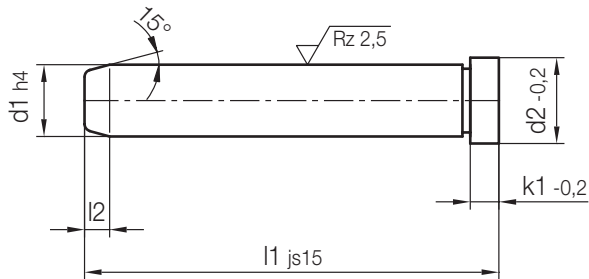


Z0100/...

Führungssäule, für Kugelführung
 Guide pillar, for ball bearing
 Colonne de guidage, pour guidage à bille

Mat.: ≈ 1.0401/720 HV 30
 ≈ DIN ISO 8404-A

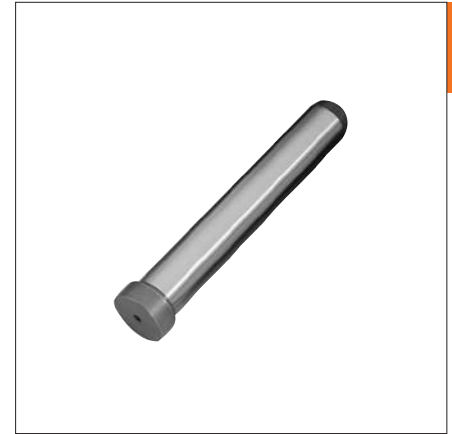

k1	l2	d2	d1	l1	Nr./No.	
3	4	12	9	60	Z0100/ 9x 60	
				80	80	
				100	100	
				120	120	
6	7	16	12	60	Z0100/12x 60	
				80	80	
				100	100	
				120	120	
				140	140	
				160	160	
				180	180	
8	18	14	14	60	Z0100/14x 60	
				80	80	
				100	100	
				120	120	
				140	140	
				160	160	
				180	180	
				200	200	
	22	18	18	18	80	Z0100/18x 80
					100	100
					120	120
					140	140
					160	160
					240	240

k1	l2	d2	d1	l1	Nr./No.				
15	7	28	24	100	Z0100/24x100				
				120	120				
				140	140				
				160	160				
				180	180				
				200	200				
				220	220				
				240	240				
				300	300				
				36	7	28	30	100	Z0100/30x100
120	120								
160	160								
200	200								
240	240								
300	300								
360	360								
32	7	28	32					100	Z0100/32x100
								120	120
								160	160
				200	200				
				240	240				
				360	360				