



Z016/...

Schrägsäule, 18°Kegel
 Angled pillar, 18° tapered
 Doigt incliné, tête conique à 18

Mat. : ≈ 1.0401 / 720 HV 30
 DIN ISO 8404-A



1

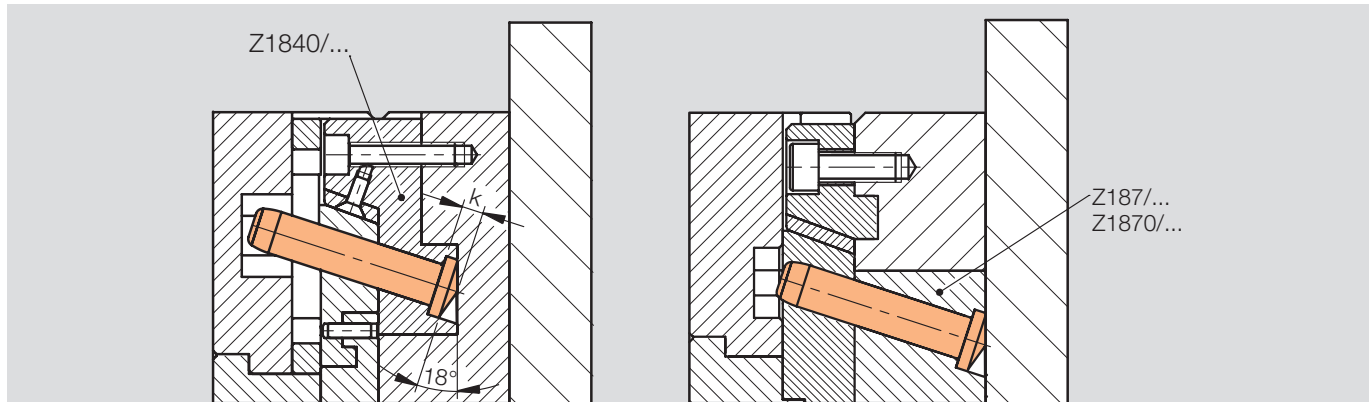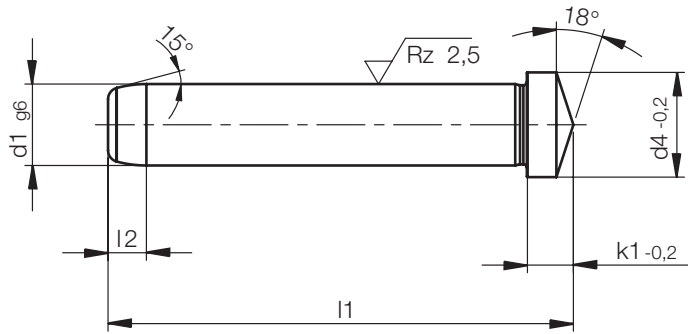

k1	l2	d4	d1	l1	Nr./No.				
3	4	10	8	40	Z016/ 8x 40				
				50	50				
				60	60				
				80	80				
				100	100				
		12	10	40	Z016/10x 40				
				60	60				
				80	80				
				100	100				
				120	120				
				6	7	16	12	60	Z016/12x 60
								80	80
100	100								
120	120								
140	140								
8	18	14	60	Z016/14x 60					
			80	80					
			100	100					
			120	120					
			140	140					
			160	160					

k1	l2	d4	d1	l1	Nr./No.		
8	7	20	16	100	Z016/16x100		
				120	120		
				140	140		
				160	160		
				180	180		
				200	200		
				22	18	100	Z016/18x100
						120	120
						140	140
						160	160
						180	180
						200	200
	24	20	100	Z016/20x100			
			120	120			
			140	140			
			160	160			
			180	180			
			200	200			