


Z80801HT/...

Sicherheitskupplung, mit freiem Durchgang
 Safety coupling, open flow
 Coupleur de sécurité, à passage ouvert

Mat.: 2.0401

Z802/...
 Z811/...
 Z83/...
 Z830/...
 Z831/...
 Z90/...

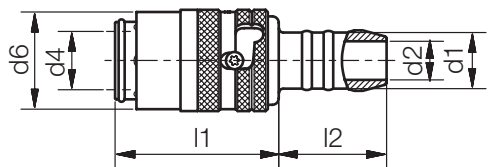

Z85/...
 Z850/...
 Z851/...
 Z852/...
 Z853/...
 Z854/...



Medium	max. C°
Luft/air/air	250
Öl/oil/huile	200
Wasser/water/eau	160



Schlauchgrenzwerte können abweichen!
 Hose limits can differ!
 Les valeurs limites des tuyaux peuvent différer!




p [bar]	l2	l1	d6	d2	d4	d1	Nr./No.
25	22,5	38,5	17,2	6	9	9	Z80801HT/ 9
	25	38	22,5	9	13	13	13

Z80801HT /...x45

Sicherheitskupplung, mit freiem Durchgang, 45° abgewinkelt
 Safety coupling, open flow, 45° angled
 Coupleur de sécurité, à passage ouvert, coudé à 45°

Mat.: 2.0401

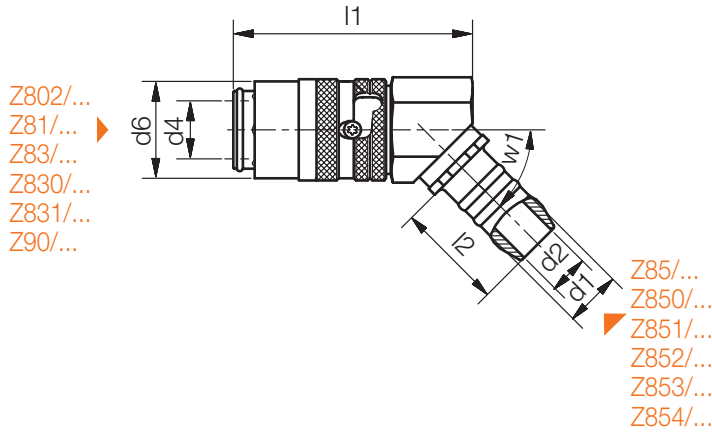

Medium	max. C°
Luft/air/air	250
Öl/oil/huile	200
Wasser/water/eau	160

⚠
 Schlauchgrenzwerte können abweichen!
 Hose limits can differ!
 Les valeurs limites des tuyaux peuvent différer!




p [bar]	l2	l1	d6	d2	d4	d1	w1	Nr./No.
25	22,5	52	17,2	6	9	9	45°	Z80801 HT/ 9x45
	25	55,5	22,5	9	13	13		13x45

Z80801HT /...x90

Sicherheitskupplung, mit freiem Durchgang, 90° abgewinkelt
 Safety coupling, open flow, 90° angled
 Coupleur de sécurité, à passage ouvert, coudé à 90°

Mat.: 2.0401

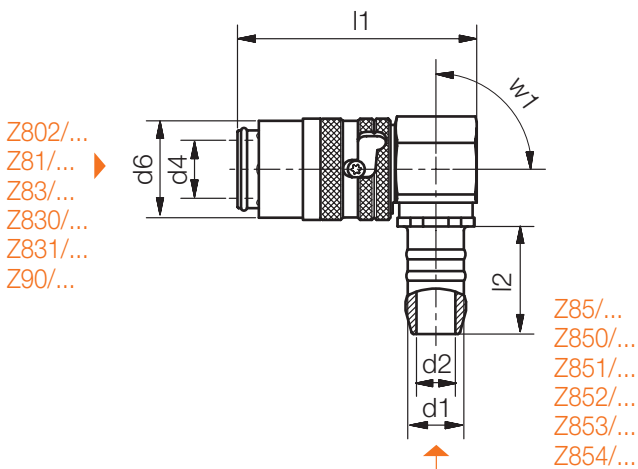

Medium	max. C°
Luft/air/air	250
Öl/oil/huile	200
Wasser/water/eau	160

⚠
 Schlauchgrenzwerte können abweichen!
 Hose limits can differ!
 Les valeurs limites des tuyaux peuvent différer!



p [bar]	l2	l1	d6	d2	d4	d1	w1	Nr./No.
25	22,5	56	17,2	6	9	9	90°	Z80801 HT/ 9x90
	25	55,5	22,5	9	13	13		13x90